


# N2XS Y 6/10 kV, 12/20 kV, 18/30 kV

XLPE-insulated, Cu-conductor, single core, screened, PVC-sheath

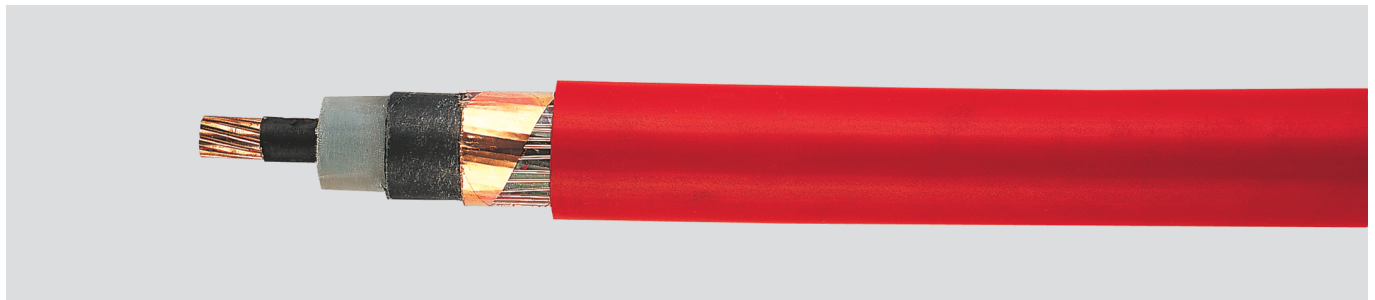

## Technical data

- XLPE-insulated power cables acc. to DIN VDE 0276 part 620, HD 620 S2 and IEC 60502
- **Temperature range**  
during installation up to -5°C
- **Operating temperature**  
max. +90°C
- **Short circuit temperature**  
+250°C (short circuit duration max. 5 s)
- **Nominal voltage**  
U<sub>0</sub>/U 6/10 kV, 12/20 kV, 18/30 kV
- **Operating voltage**, 50 Hz  
for 6/10 kV = max. 12 kV  
for 12/20 kV = max. 24 kV  
for 18/30 kV = max. 36 kV
- **Test voltage**  
for 6/10 kV = 21 kV  
for 12/20 kV = 42 kV  
for 18/30 kV = 63 kV
- **Minimum bending radius**  
15x cable Ø
- **Power ratings table**  
see "Technical Informations"

## Cable structure

- Bare copper conductor, to DIN VDE 0295 cl.2, multi-wire, BS 6360 cl.2, IEC 60228 cl.2
- Inner semi-conducting coating
- Core insulation of cross-linked polyethylene (XLPE), compound type DIX8 to HD 620 S2
- Outer conductive layer extruded and permanently welded with the core insulation
- Conductive wrapping
- Screen: Braiding of copper wires with one or two tapes applied helically
- Wrapping
- Outer sheath of PVC compound type DMV6 to HD 620 S2
- Sheath colour: red

## Properties

- The materials used during manufacturing are cadmium-free, contain no silicone and are free from substances harmful to the wetting properties of lacquers

## Tests

- Self-extinguishing and flame retardant acc. to DIN VDE 0482-332-1-2, DIN EN 60332-1-2, IEC 60332-1-2 (equivalent DIN VDE 0472 part 804 test method B)

## Installation notes

- To guarantee an optimum on operating reliability the extruded semi-conductive layer is spliced with the insulation for long duration. For this reason we recommend a peeling tool for installation

## Note

- rm = round conductor, multi-wire
- Further dimensions available on request.
- AWG sizes are approximate equivalent values. The actual cross section is in mm<sup>2</sup>.

## Application

Suitable for installation mostly for power supply stations, in indoors and in cable ducts, outdoor with protected laying, underground and in water as well as for installation on cable trays for industries, switch-boards and power stations. Due to the good laying characteristic, this can also be laid easily in difficult line guideways. The inner conducting layer between the conductor and the XLPE insulation and the firmly bonded outer conducting layer on the XLPE insulation assures a construction free of partial discharges with high operational reliability.

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Sheath thickness Nominal value mm	Outer Ø min. - max. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
32400	1 x 35 rm / 16	12	6 / 10	3,4	2,5	23,0 - 28,0	518,0	905,0	2
32401	1 x 50 rm / 16	12	6 / 10	3,4	2,5	24,0 - 29,0	662,0	1080,0	1
32402	1 x 70 rm / 16	12	6 / 10	3,4	2,5	26,0 - 31,0	854,0	1310,0	2/0
32403	1 x 95 rm / 16	12	6 / 10	3,4	2,5	26,0 - 32,0	1094,0	1580,0	3/0
32404	1 x 120 rm / 16	12	6 / 10	3,4	2,5	28,0 - 34,0	1334,0	1860,0	4/0
32405	1 x 150 rm / 16	12	6 / 10	3,4	2,5	29,0 - 35,0	1622,0	2040,0	300 kcmil
32406	1 x 150 rm / 25	12	6 / 10	3,4	2,5	29,0 - 35,0	1723,0	2210,0	300 kcmil
32407	1 x 185 rm / 16	12	6 / 10	3,4	2,5	31,0 - 37,0	1958,0	2450,0	350 kcmil
32408	1 x 185 rm / 25	12	6 / 10	3,4	2,5	31,0 - 37,0	2059,0	2580,0	350 kcmil
32409	1 x 240 rm / 16	12	6 / 10	3,4	2,5	33,0 - 39,0	2486,0	3000,0	500 kcmil
32410	1 x 240 rm / 25	12	6 / 10	3,4	2,5	33,0 - 39,0	2587,0	3130,0	500 kcmil
32411	1 x 300 rm / 25	12	6 / 10	3,4	2,5	36,0 - 41,0	3163,0	3780,0	600 kcmil
32412	1 x 400 rm / 35	12	6 / 10	3,4	2,5	40,0 - 45,0	4234,0	4670,0	750 kcmil
32413	1 x 500 rm / 35	12	6 / 10	3,4	2,5	43,0 - 48,0	5194,0	5750,0	1000 kcmil
33099	1 x 630 rm / 35	12	6 / 10	3,4	2,5	44,0 - 49,0	6442,0	7180,0	1250 kcmil
32414	1 x 35 rm / 16	24	12 / 20	5,5	2,5	27,0 - 32,0	518,0	1110,0	2
32415	1 x 50 rm / 16	24	12 / 20	5,5	2,5	28,0 - 33,0	662,0	1250,0	1
32416	1 x 70 rm / 16	24	12 / 20	5,5	2,5	30,0 - 35,0	854,0	1510,0	2/0
32417	1 x 95 rm / 16	24	12 / 20	5,5	2,5	31,0 - 36,0	1094,0	1780,0	3/0
32418	1 x 120 rm / 16	24	12 / 20	5,5	2,5	32,0 - 38,0	1334,0	2070,0	4/0
32419	1 x 150 rm / 16	24	12 / 20	5,5	2,5	33,0 - 39,0	1622,0	2310,0	300 kcmil
32420	1 x 150 rm / 25	24	12 / 20	5,5	2,5	33,0 - 39,0	1723,0	2420,0	300 kcmil
32421	1 x 185 rm / 16	24	12 / 20	5,5	2,5	35,0 - 41,0	1958,0	2650,0	350 kcmil
32422	1 x 185 rm / 25	24	12 / 20	5,5	2,5	35,0 - 41,0	2059,0	2810,0	350 kcmil
32423	1 x 240 rm / 16	24	12 / 20	5,5	2,5	38,0 - 44,0	2486,0	3260,0	500 kcmil
32424	1 x 240 rm / 25	24	12 / 20	5,5	2,5	38,0 - 44,0	2587,0	3360,0	500 kcmil
32425	1 x 300 rm / 25	24	12 / 20	5,5	2,5	40,0 - 46,0	3163,0	4020,0	600 kcmil
32426	1 x 400 rm / 35	24	12 / 20	5,5	2,5	43,0 - 49,0	4234,0	4930,0	750 kcmil
32427	1 x 500 rm / 35	24	12 / 20	5,5	2,5	46,0 - 52,0	5194,0	6050,0	1000 kcmil
33096	1 x 630 rm / 35	24	12 / 20	5,5	2,5	47,0 - 53,0	6442,0	7510,0	1250 kcmil

Continuation ►

# N2XSY 6/10 kV, 12/20 kV, 18/30 kV

XLPE-insulated, Cu-conductor, single core, screened, PVC-sheath



Part no.	No. cores x cross-sec. mm <sup>2</sup>	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Sheath thickness Nominal value mm	Outer Ø min. - max. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
32428	1 x 50 rm / 16	36	18 / 30	8	2,5	32,0 - 38,0	662,0	1480,0	1
32429	1 x 70 rm / 16	36	18 / 30	8	2,5	34,0 - 40,0	854,0	1730,0	2/0
32430	1 x 95 rm / 16	36	18 / 30	8	2,5	35,0 - 41,0	1094,0	2060,0	3/0
32431	1 x 120 rm / 16	36	18 / 30	8	2,5	37,0 - 43,0	1334,0	2330,0	4/0
32432	1 x 150 rm / 25	36	18 / 30	8	2,5	38,0 - 44,0	1723,0	2720,0	300 kcmil
32433	1 x 185 rm / 25	36	18 / 30	8	2,5	40,0 - 46,0	2059,0	3100,0	350 kcmil
32434	1 x 240 rm / 25	36	18 / 30	8	2,5	42,0 - 48,0	2587,0	3730,0	500 kcmil
32435	1 x 300 rm / 25	36	18 / 30	8	2,5	45,0 - 51,0	3163,0	4000,0	600 kcmil
32436	1 x 400 rm / 35	36	18 / 30	8	2,5	48,0 - 54,0	4234,0	5330,0	750 kcmil
32437	1 x 500 rm / 35	36	18 / 30	8	2,5	51,0 - 57,0	5194,0	6480,0	1000 kcmil
33098	1 x 630 rm / 35	36	18 / 30	8	2,5	52,0 - 59,0	6442,0	7970,0	1250 kcmil

Dimensions and specifications may be changed without prior notice. (RQ03)