


Cable binders T (with plastic tongue)

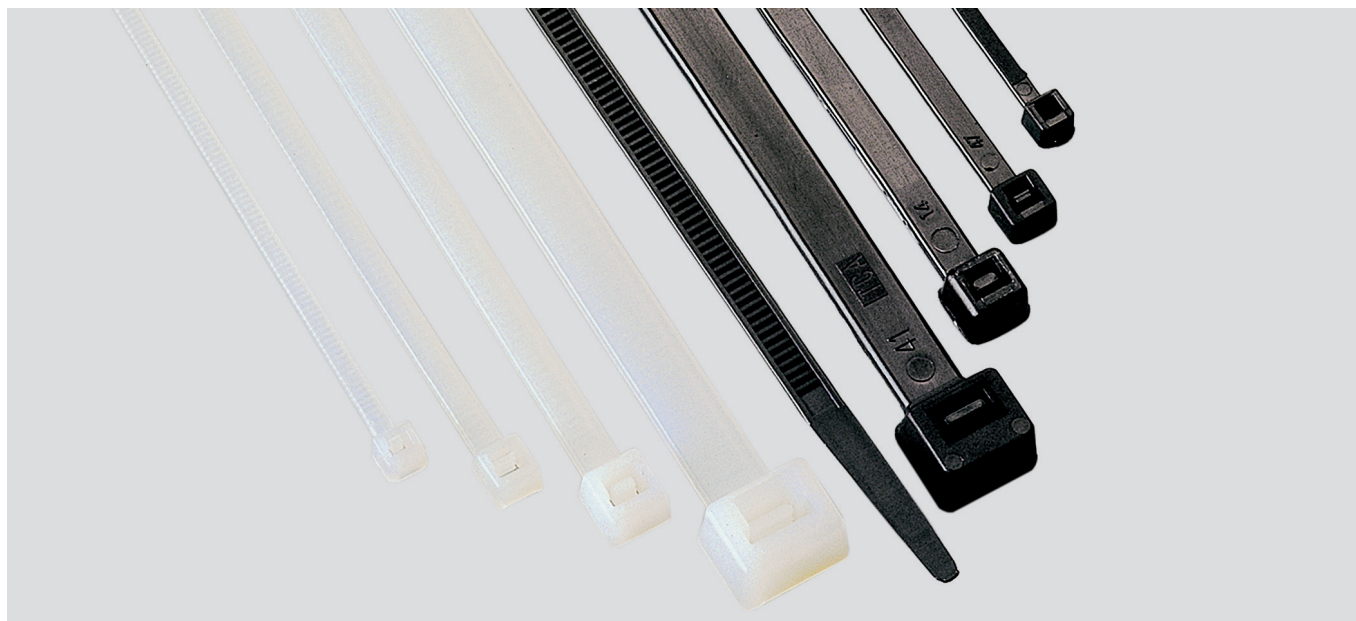

Cable binder

Cable binder with plastic tongue for directionality and mounting cables and lines.

Material

- halogen-free
- silicone-free polyamide 6.6

Technical data

Temperature range: -40°C to +80°C
Flammability acc. to UL 94 V2

Part No. transparent	Part No. black	Type	Length mm	Width mm	Bundle Ø mm	Load capacity kp	Unit	net EUR/100 items at acceptance of		
								up to 1000	1001 - 5000	5001 - 10000
91121	90130	T2-20	100,0	2,5	20,0	8,0	1000	o. r.	o. r.	o. r.
91122	90131	T2-50	200,0	2,5	50,0	8,0	1000	o. r.	o. r.	o. r.
91123	90132	T3-35	145,0	3,4	35,0	13,0	1000	o. r.	o. r.	o. r.
91124	90133	T3-50	210,0	3,4	50,0	13,0	1000	o. r.	o. r.	o. r.
91125	90134	T3-75	300,0	3,6	75,0	13,0	1000	o. r.	o. r.	o. r.
91130	90137	T5-85	185,0	4,6	50,0	22,0	1000	o. r.	o. r.	o. r.
91127	90136	T5-75	300,0	4,6	75,0	22,0	1000	o. r.	o. r.	o. r.
90158	90148	T5-100	380,0	4,7	100,0	22,0	100	o. r.	o. r.	o. r.
91126	90135	T5-50	200,0	4,8	50,0	22,0	1000	o. r.	o. r.	o. r.
90159	90149	T8-100	365,0	7,6	100,0	54,0	100	o. r.	o. r.	o. r.
96491	96492	T9-165	550,0	9,0	165,0	79,0	100	o. r.	o. r.	o. r.
97219	97223	T9-230	775,0	9,0	230,0	79,0	100	o. r.	o. r.	o. r.

small pack

Part No. transparent	Part No. black	Type	Length mm	Width mm	Bundle Ø mm	Load capacity kp	Unit	net EUR/100 items at acceptance of		
								up to 1000	1001 - 5000	5001 - 10000
90150	90140	T2-20	100,0	2,5	20,0	8,0	100	o. r.	o. r.	o. r.
90151	90141	T2-50	200,0	2,5	50,0	8,0	100	o. r.	o. r.	o. r.
90152	90142	T3-35	145,0	3,4	35,0	13,0	100	o. r.	o. r.	o. r.
90153	90143	T3-50	210,0	3,4	50,0	13,0	100	o. r.	o. r.	o. r.
90154	90144	T3-75	300,0	3,6	75,0	13,0	100	o. r.	o. r.	o. r.
90157	90147	T5-85	185,0	4,6	50,0	22,0	100	o. r.	o. r.	o. r.
90156	90146	T5-75	300,0	4,6	75,0	22,0	100	o. r.	o. r.	o. r.
90155	90145	T5-50	200,0	4,8	50,0	22,0	100	o. r.	o. r.	o. r.

o. r. = on request