


# shrink-on tube SCH

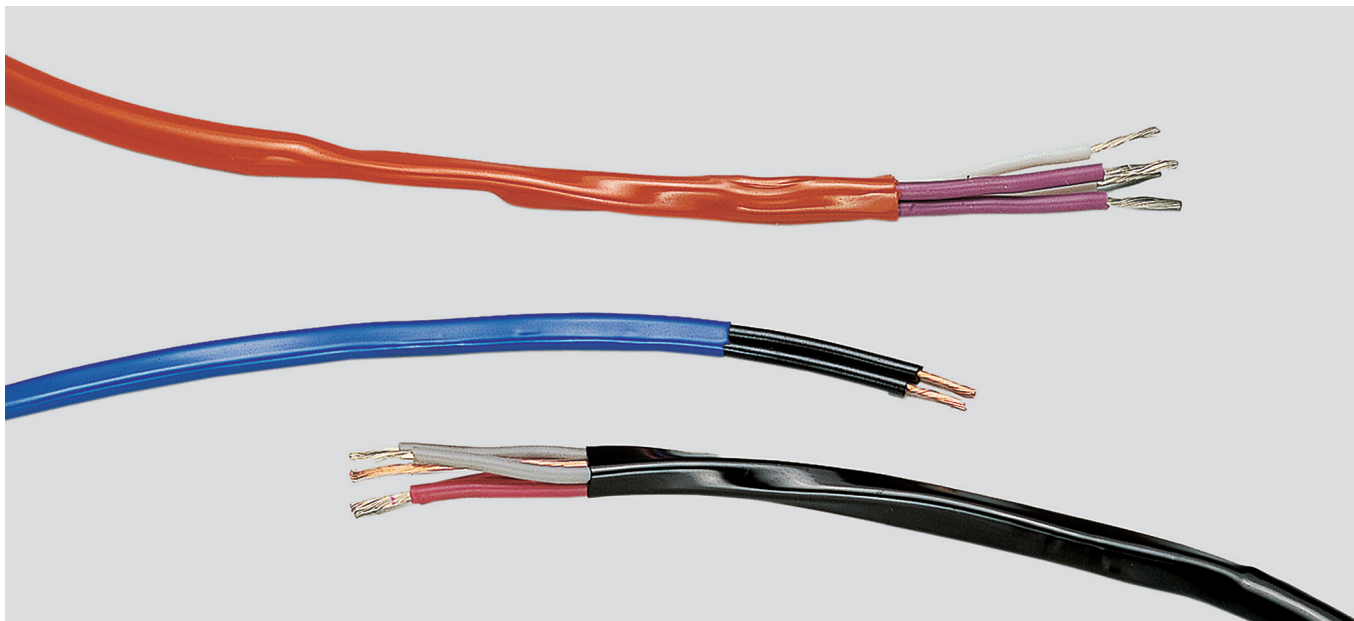

## SCH

PVC shrunk tube for repairing insulation and sealing electrical components.

## Application

Plant and machine construction Robot construction Automation technology Vehicle construction and shipbuilding Installation technology Control cabinet construction

## Material

PVC

Colour: black

## Technical data

Temperature range: -20°C to +90°C

Shrinking temperature: +120°C

Shrinking rate: 2:1

## Note

Do not store tubes at over 18°C  
Length shrinkage approx. 20-30%  
Other colours on request.

Part No.	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	net EUR/100 metres at acceptance of		
						up to 100	101 - 500	501 - 1000
91300	2,5	0,2	1,2	100,0	-	o. r.	o. r.	o. r.
91301	4,0	0,25	2,0	100,0	-	o. r.	o. r.	o. r.
91302	6,0	0,25	3,0	100,0	-	o. r.	o. r.	o. r.
91303	7,0	0,25	4,0	100,0	-	o. r.	o. r.	o. r.
91304	11,0	0,3	6,0	100,0	-	o. r.	o. r.	o. r.
91305	14,0	0,3	8,0	100,0	-	o. r.	o. r.	o. r.
91306	17,0	0,4	10,0	100,0	-	o. r.	o. r.	o. r.
91307	20,0	0,5	13,0	100,0	-	o. r.	o. r.	o. r.
91308	25,0	0,5	16,0	50,0	-	o. r.	o. r.	o. r.
91309	31,0	0,5	20,0	50,0	-	o. r.	o. r.	o. r.

o. r. = on request