


HELUTOP® SH / SHV (holder)

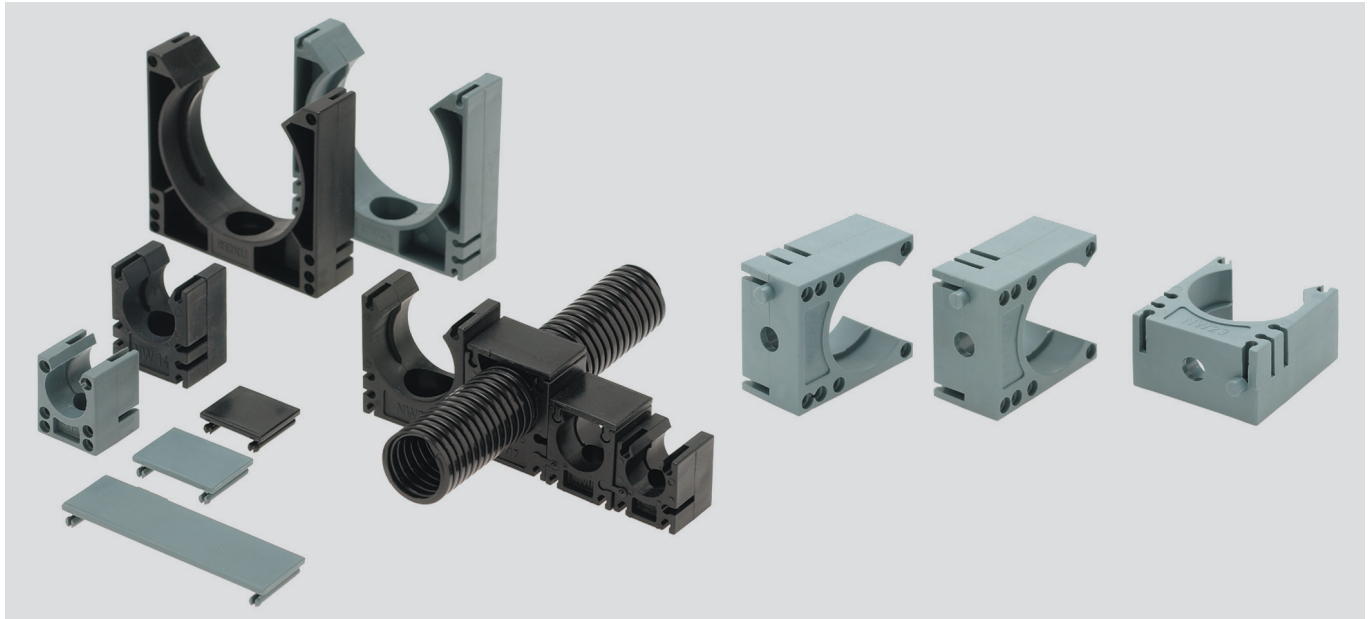

HELUTOP® SH

System holder for HELUcond protection tubes.
 Universal system holder with optional clips for extreme loads.
 Quick assembly through single-hole fastening.

Properties

- Resistant to fuels, mineral oils, greases, weak bases, weak acids

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material


polyamide PA 6

- halogen-free

Flammability acc. to UL 94

Technical Data

Temperature range: -40°C to +110°C

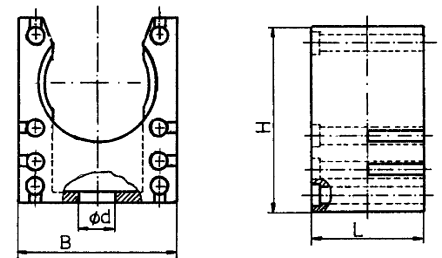

HELUTOP holder

Part No. grey	Part No. black	Suitable for tube ND mm	Width mm	Height mm	Unit	net EUR/100 items at acceptance of		
						up to 100	101 - 500	501 - 1000
94663	99270	7,5	20	18	100	o. r.	o. r.	o. r.
94664	99271	10	20	23	100	o. r.	o. r.	o. r.
94665	99272	12	22	26	50	o. r.	o. r.	o. r.
920323	920324	14	28	33	50	o. r.	o. r.	o. r.
94666	99273	16/17	28	33	50	o. r.	o. r.	o. r.
94667	99274	21/23	35	40	50	o. r.	o. r.	o. r.
94668	99275	29	43	45	30	o. r.	o. r.	o. r.
94669	99276	36/37	54	53	20	o. r.	o. r.	o. r.
94670	99277	48/50	68	66	20	o. r.	o. r.	o. r.

HELUTOP holder with lock against rotation

Part No. grey	Part No. black	Suitable for tube ND mm	Width mm	Height mm	Unit	net EUR/100 items at acceptance of		
						up to 100	101 - 500	501 - 1000
920325	920330	16/17	28	33	50	o. r.	o. r.	o. r.
920326	920331	21/23	35	40	50	o. r.	o. r.	o. r.
920327	920332	29	43	45	30	o. r.	o. r.	o. r.
920328	920333	36/37	54	53	20	o. r.	o. r.	o. r.
920329	920334	48/50	68	66	20	o. r.	o. r.	o. r.

o. r. = on request