


# Type M

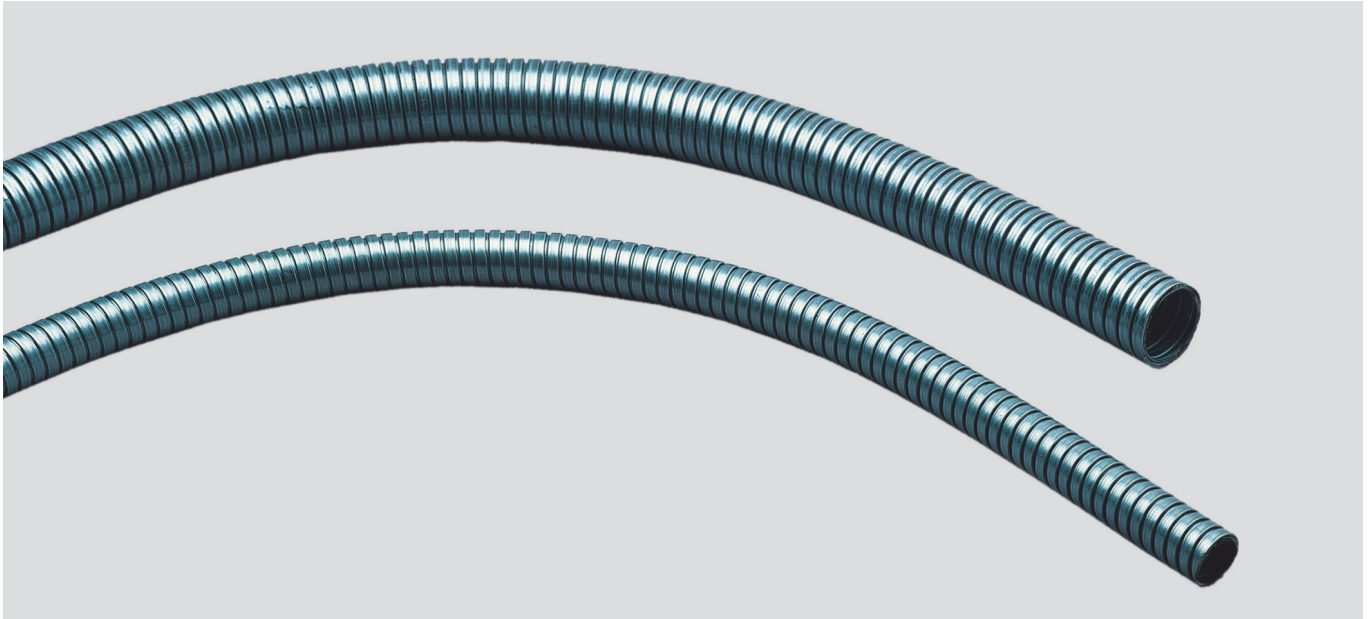

## Type M

Spiral wound metallic tube with double-folded profile (Agraff profile). High tensile and torsional strength.

## Material

Cold rolled strip St 2 acc. to DIN 1624, galvanised, Fe/Zn 3

## Technical Data

Protection classification : IP 40

Temperature range: up to +220°C

## Application

- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

## Note

Suitable connection glands:  
US, LI

Part No.	Size PG	Size metric	Inner Ø mm	Outer Ø mm	Per metres	net EUR/100 metres at acceptance of		
						up to 100	101 - 500	501 - 1000
97014	-	-	8,0	10,0	50	o. r.	o. r.	o. r.
97015	-	-	12,0	14,0	50	o. r.	o. r.	o. r.
97016	-	-	14,0	17,0	50	o. r.	o. r.	o. r.
97017	-	-	16,0	19,0	50	o. r.	o. r.	o. r.
97018	-	-	18,0	21,0	50	o. r.	o. r.	o. r.
97019	-	-	24,0	27,0	50	o. r.	o. r.	o. r.
97020	-	-	31,0	36,0	25	o. r.	o. r.	o. r.
97021	-	-	40,0	45,0	25	o. r.	o. r.	o. r.
97022	-	-	51,0	56,0	25	o. r.	o. r.	o. r.

o. r. = on request